


**AVAILABLE
IN 4 SIZES**

WESTCHOCK Wheelchock's are made from UV stabilised polythene and have inbuilt strength through clever internal crush resistant supports moulded into one design. They are then polyurethane foam-filled under pressure to ensure maximum fill, giving maximum strength with minimum weight making these chocks user friendly and efficient.

All WESTCHOCK's have skid resistant rubber feet or strips to minimise the possibility of slippage even on very smooth surfaces, and all have easy to grab handles moulded into the main body of the chock.

Designed around the rugged requirements of the Australian outback, all WESTCHOCK products are built tough and are easy to handle and use.

**SCAN ME**

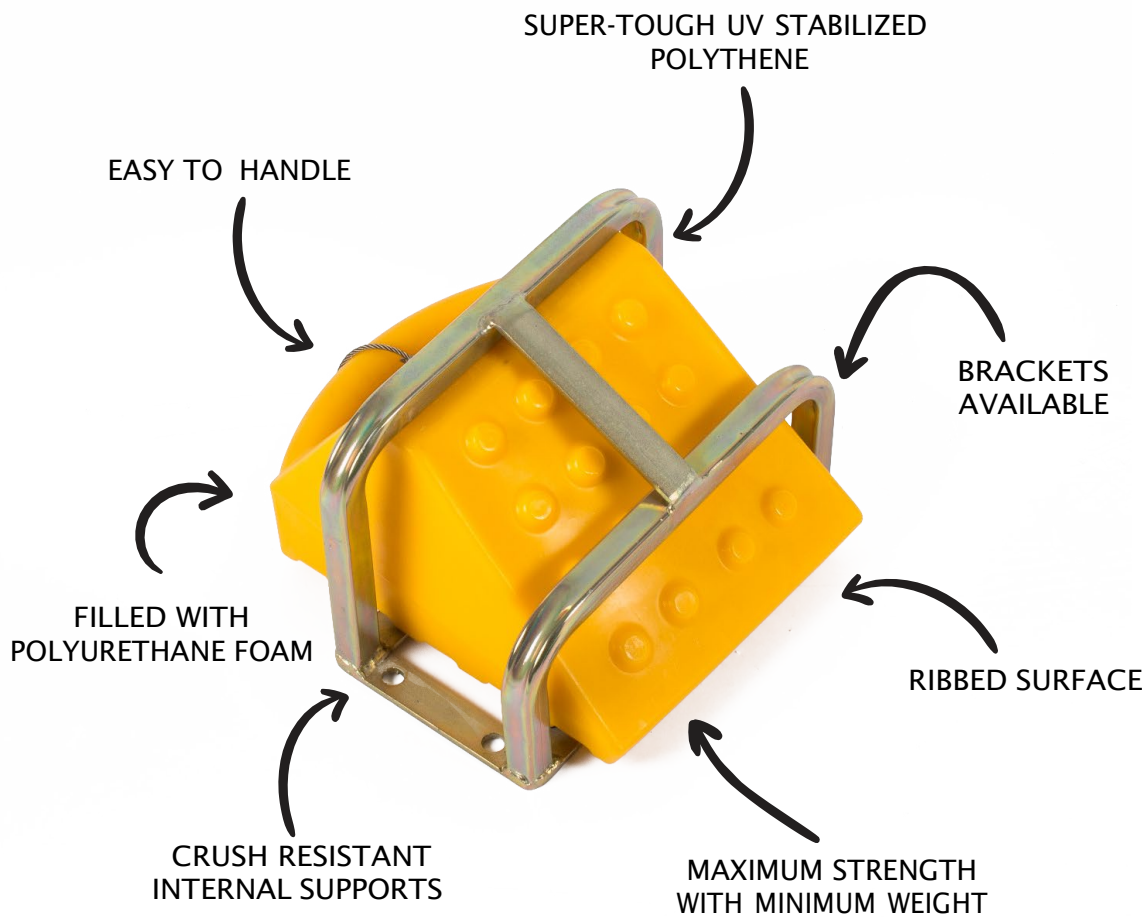

TECHNICAL SPECIFICATIONS

WHEELCHOCKS

Item Code	WC1055	WC1075	WC1105	WC1155
Working Load Limit	Up to 5 Tonne	Up to 40 Tonne	Up to 150 Tonne	Over 150 Tonne
Weight	1.5kg	8kg	9.5kg	12.5kg
Dimensions (HxWxL)	164 x 240 x 300mm	280 x 330 x 560mm	270 x 400 x 580mm	390 x 440 x 650mm

BRACKETS

Item Code	WC1055 Ali Bracket	WC1075 Zinc Bracket	WC1105 Zinc Bracket	WC1155 Zinc Bracket
Material	Aluminium	Zinc	Zinc	Zinc



OEM GROUP

YOUR PARTNER IN
PRODUCTIVITY

Version 2 - 03/05/2021

PERTH

494 - 498 Great Eastern Hwy, Ascot, 6104
P: +61 8 9270 0200
E: contactoem@oemgroup.com.au

PILBARA

50 Oxide Loop, Gap Ridge, 6714
P: +61 8 9131 5007
E: contactoem@oemgroup.com.au

Freecall: 1800 783 774

ABN: 63 160 693 961

OEMGROUP.COM.AU

